

# EAGLE*i*

BY **DS18**<sup>®</sup>

## CAR BACKUP CAMERA

### LICENSE PLATE REAR VIEW

### OWNER'S MANUAL



MODELS

**RCNLP/BK & RCNLP/SL**

# EAGLE*i* CAR BACKUP CAMERA

## INSTRUCTIONS


Please read the entire instruction manual before using the product and save it for future reference. We reserve the right for any errors in text or images and any necessary changes made to technical data. If you have any questions regarding technical problems please contact Customer Services.

## INSTALLATION INSTRUCTION

- No need to drill holes for bracket installation.
- Hidden bracket will not cover any information of your license plate.
- Compact Size



REVERSE LAMP OR DC: 12V

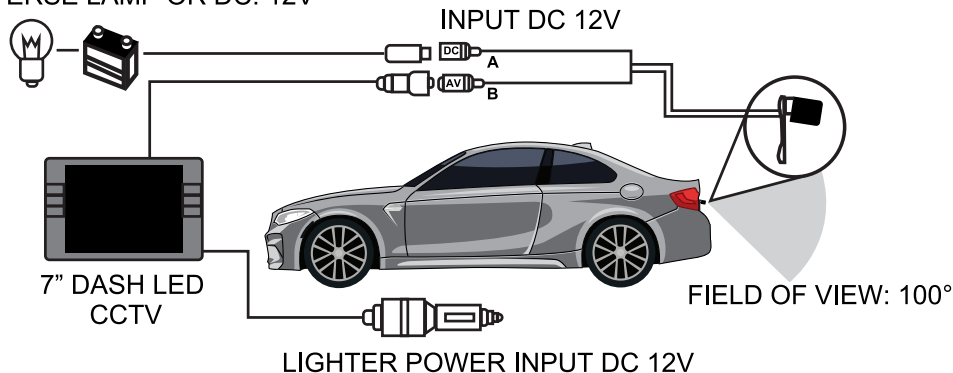

## WARNING

To prevent fire or shock hazard, do not expose the inside of the unit to rain or moisture.

This symbol is intended to alert the user to the presence of important operating and maintenance instructions in the literature accompanying the appliance

This symbol is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock

## CAUTION

Do not open the cover of the camera. It will no longer be waterproof when opened.

Do not open aim the camera bright or strong light sources, this will make the camera ineffective in capturing video.

- A. Black socket is connected to DC12V
- B. Yellow socket is for video output

# RCNLP/BK & RCNLP/SL

## SPECIFICATIONS


Image Sensor .....	PC7070
TV System .....	PAL/NTSC
Effective Pixels .....	648X488 Pixels
Sensing Area .....	5.55um x 5.55um
Scanning System .....	2:1 Interlance
Sync System .....	Internal
Resolution .....	420 TV Lines
Horizontal Sync, Frequency .....	15.625KHz - 15.734KHz
Vertical Sync, Frequency.....	50Hz - 60Hz
Minimum Illumination.....	1.5 lux/F1.2
Video Output.....	1.0VP - P.750hm
Gamma Consumption .....	0.45
AGC.....	Auto
S/N Ratio .....	Better than 48dB
White Balance .....	Auto
Electronic Shutter\.....	1/60~1/15,000 Seconds
BLC .....	Auto
Current Consumption .....	.80Ma
Power Supply.....	DC 12V
Operating Temperature.....	10°C~46°C RH 95% MAX
Storage Temperature.....	-30°C~60°C RH 95% MAX
Lens.....	1.8mm F=2.0
Lens Angle.....	100°
Waterproof Grade.....	IP 67

#WELIKEITLOUD



# EAGLE*i*

BY **DS18**<sup>®</sup>



FOR MORE INFORMATION PLEASE  
VISIT OUR WEBSITE  
**WWW.DS18.COM**

**#WELIKEITLOUD**

